


RAKE SUSPENDED Z-540

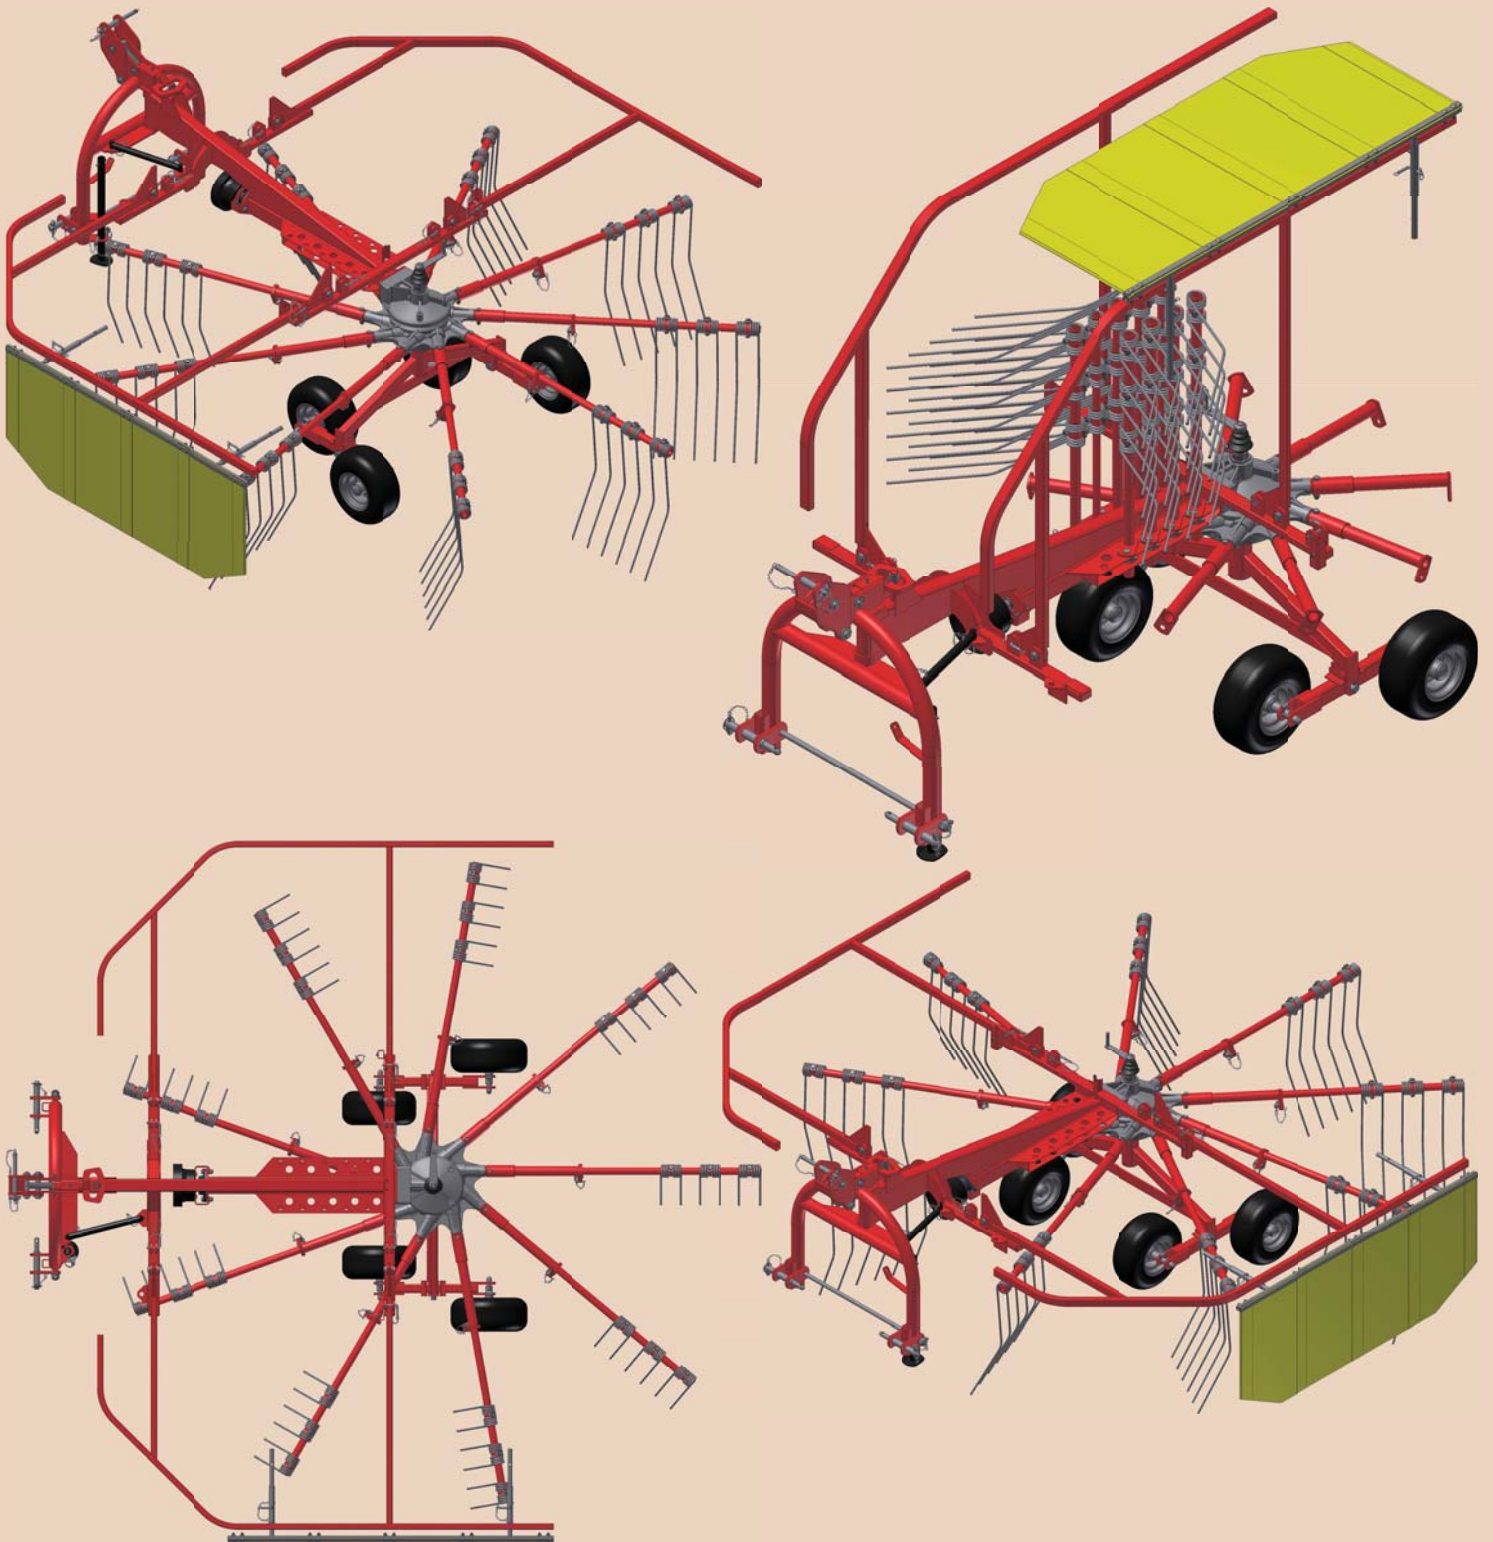

PRZEDSIĘBIORSTWO PRODUKCYJNO-USŁUGOWO-HANDLOWE

POMAROL S.A.

11-300 Biskupiec ul. Przemysłowa 4

tel. +48 89 715-20-71; fax +48 89 715-20-73, 715-26-78

www.pomarol.com.pl e-mail: sprzedaz@pomarol.com.pl


RAKE SUSPENDED Z-540

Rake Z-540 is intended for tedding and raking grasses and short-stem green forages on arable fields and meadows of a levelled surface. The best results are achieved by raking pre-dried green forage or hay to form ballots, as it shapes a loose roll with an uniform cross section. Due to such a solution, it is possible to get the maximal output of the picking up machines.

RAKE Z-540	Manufacturer: PPUH POMAROL S.A. 11-300 Biskupiec	
Rake suspended type	Z-540	
Working width	300 cm	
Dimensions	Work	Transport
Width [cm]	325	135
Height [cm]	132	215
Length [cm]	347	265
Weight	about 370 kg	
Number of arms	9 pieces	
Number of teeth raking per arm	3 pieces	
Tires	15x6.00 (6 PR)	
Rotational speed PTO	350÷540 rpm	
Working speed	to 15 km/h	
Transport speed	to 20 km/h	
Rotors	1 szt.	
Efficiency	to 2,5 ha/h	
Noise level	76 dB	
PTO drive shaft	LFMR S.A. Lublin	
- type	5R	
- symbol	C 50270	
- minimal torque	400 Nm	
- minimal passed power	22 kW	
- minimal length	1010 mm	
- information about „CE” sign	have „CE” sign	
- end from tractor side (spline)	6	
- end from machine side (spline)	6	
- rotational speed	540 rpm	



Working height is adjustable by crank handle, extremely easy to operate in an upright position.

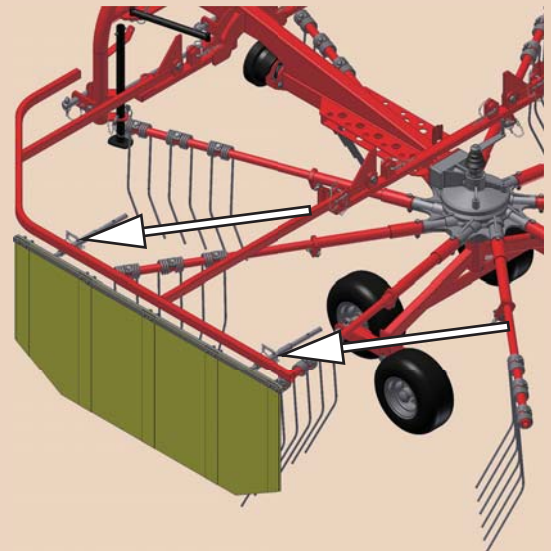

Depending on the amount of feed and the desired width apron rakes can be adjusted.



PRZEDSIĘBIORSTWO PRODUKCYJNO-USŁUGOWO-HANDLOWE
POMAROL S.A.

11-300 Biskupiec ul. Przemysłowa 4
tel. +48 89 715-20-71; fax +48 89 715-20-73, 715-26-78
www.pomarol.com.pl e-mail: sprzedaz@pomarol.com.pl